


Slotted Trunking HNG-V1




Fig. 1: HNG3703707035B




- certified for application within rolling stocks according to:
DIN5510: *S3 / SR 2 / ST 2*
NF-F-16 101,102: *F3 / I4*
- certified according to EN 50085-2-3
- halogen free
- wiring duct dimensions according to DIN 43659
- web distance 12,5 mm
- line occupancy until 6 mm²
- base holes according to EN 50085
- self-extinguishing according to UL94 V1
- temperature-resistant - 25°C bis + 90°
- UL listed File-Nr.: 48414 (all colors)
- CSA listed File-Nr.: 22009 (all colors)

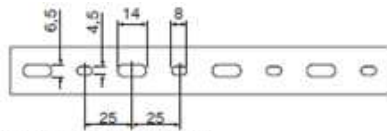


for width 25 mm

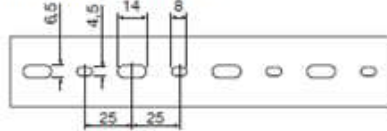


for width 37 mm

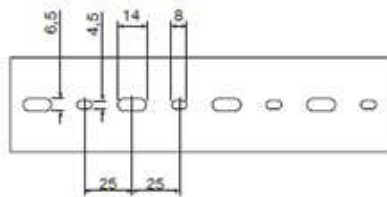


for width 50 mm

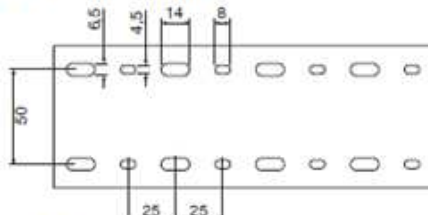



for width 75 mm

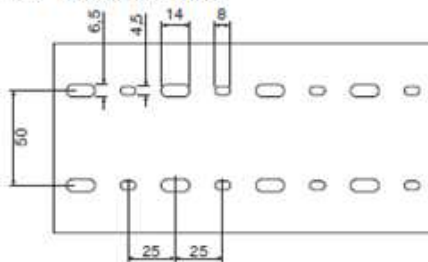


for width 100 mm

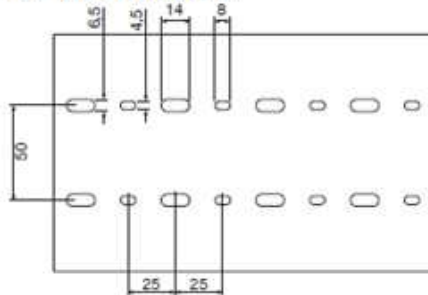


for width 125 mm




for height 25 mm



for height 37 mm



for height 50 mm



for height 75 mm

CONTACT

Tobias Kraft

Product Manager PL Slotted Trunking

Product Marketing Cable Management

Tel. : +49 (0)6842 992-1210

tobias.kraft@hagergroup.com